



TS-2 Cut Sheet



Features

- LCD Display, Easy Operation
- Seamless Connectivity with Hydro-X
- Replace Thermostat to Control Commercial AC Units
- No Extra Power Needed
- Micro-SD slot for Firmware Upgrades

Overview

The TS-2 thermostat stations is designed to replace a thermostat connected to a standard HVAC unit. The TS-2 can be used to control most HVAC systems including heat pump and multi-stage HVAC systems. The TS-2 is wired to the HVAC system using the same low-voltage thermostat cable, and has the standard color-coded wiring as most thermostats. The Hydro-x allows separate Day and Night settings for each of up to (4) TS modules, so multiple HVAC systems can be controlled by a single Hydro-X system. The TS-2 also has an adjustable delay time for each HVAC systems being activated. That minimizes high start-up (inrush current) and allows up to 4 HVAC systems to be safely controlled.

M Product Specifications

Dimensional Diagram

Package Content

- 1 x Thermostat Station (TS-2)
- 1 x 16ft RJ12 Cable
- 1 x 4ft RJ12 Cable
- 1 x RJ12 T-Splitter

Certifications

ETL/FCC

Degree of Ingress Protection

IP20

Input Voltage

12V

Maximum Current

0.1A

Working Environment


Temperature 32-122°F, Humidity<90%

Packaging Dimensions

160mm(L) x 86mm(W) x 86mm(H)

G.W. per pack

0.40kgs

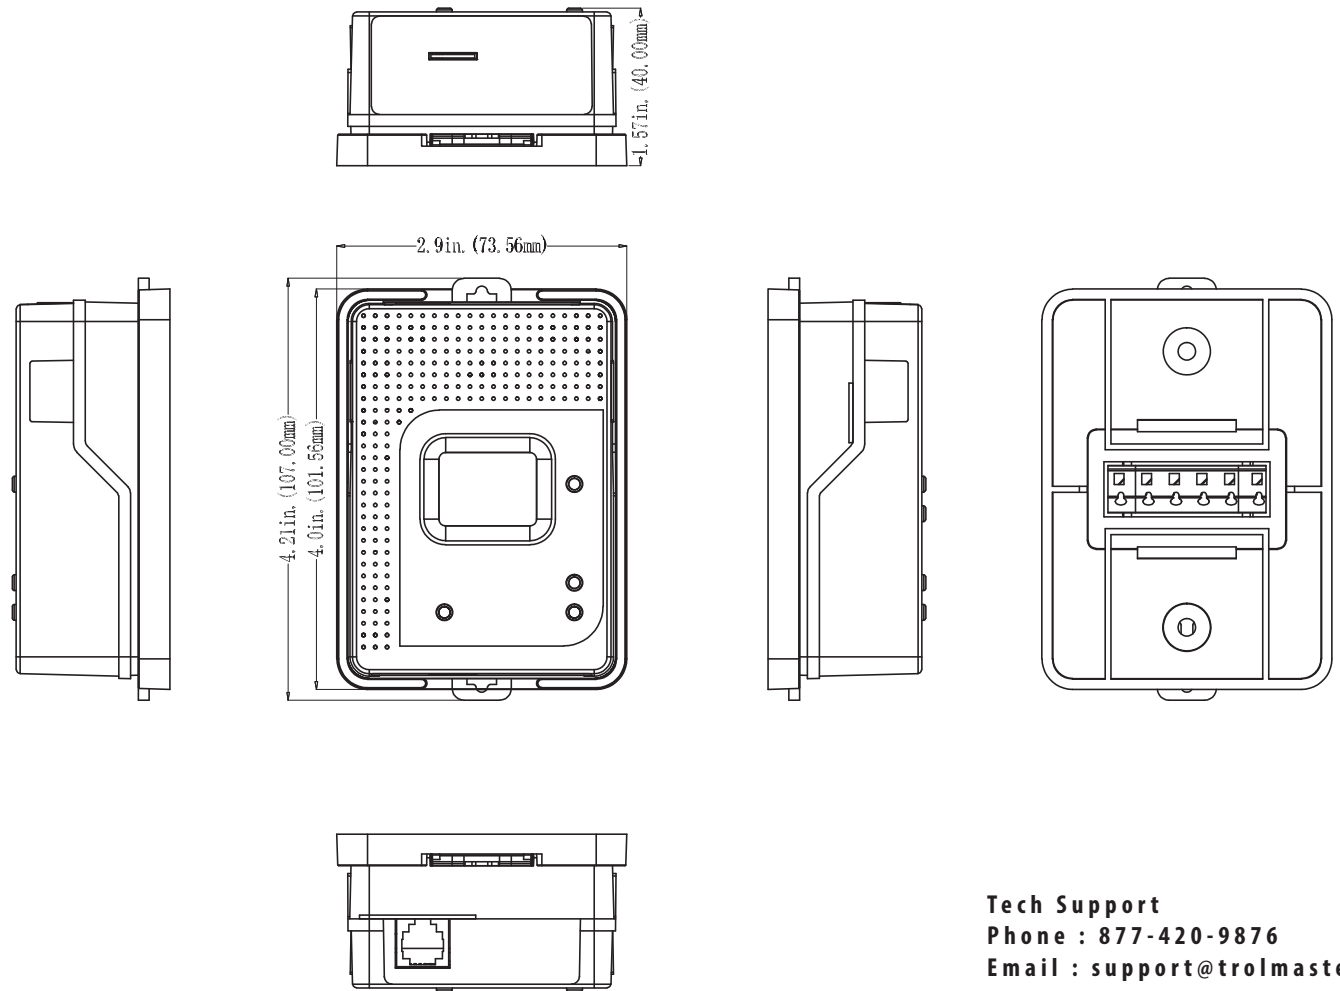

Tech Support

Phone : 877-420-9876

Email : support@trolmaster.com



Intertek
5008191

CONFORMS TO
UL STD.61010-1
CERTIFIED TO CSA STD.
C22.2#61010-1