



# WCS-1 Cut Sheet



## *Features*

- LCD Display, Easy Operation
- Addressing Button
- Water Content Real-time Measuring
- Alarm When Setpoint Exceeded

## *Overview*

The WCS-1 water content sensor allows the user to monitor the % of water / nutrients within the growing medium. The moisture level / water content is displayed in real-time on the WCS module itself, the Aqua-x and the APP. That data is displayed on a graph (through the APP) and helps the user visualize the dry-down time, and to make adjustments to their irrigation timers / irrigation cycles. Up to 8 WCS-1 can be connected to a single Aqua-x. When multiple WCS-1 are connected to a single Aqua-X, the displayed value on the Aqua-x and APP will be the AVERAGE of all of the sensors.

# **M** Product Specifications

## *Dimensional Diagram*

### **Package Content**

- 1 x Water Content Sensor
- 1 x RJ12 T-Splitter
- 1 x 16ft RJ12 Cable

### **Input Voltage**

12 VDC

### **Max Input Current**

0.1A

### **Working Environments**


Temperature 32-122°F, Humidity=90%

### **Measuring Range**

0~100%

### **Package Dimensions**

275mm(L) x 164mm(W) x 62mm(H)

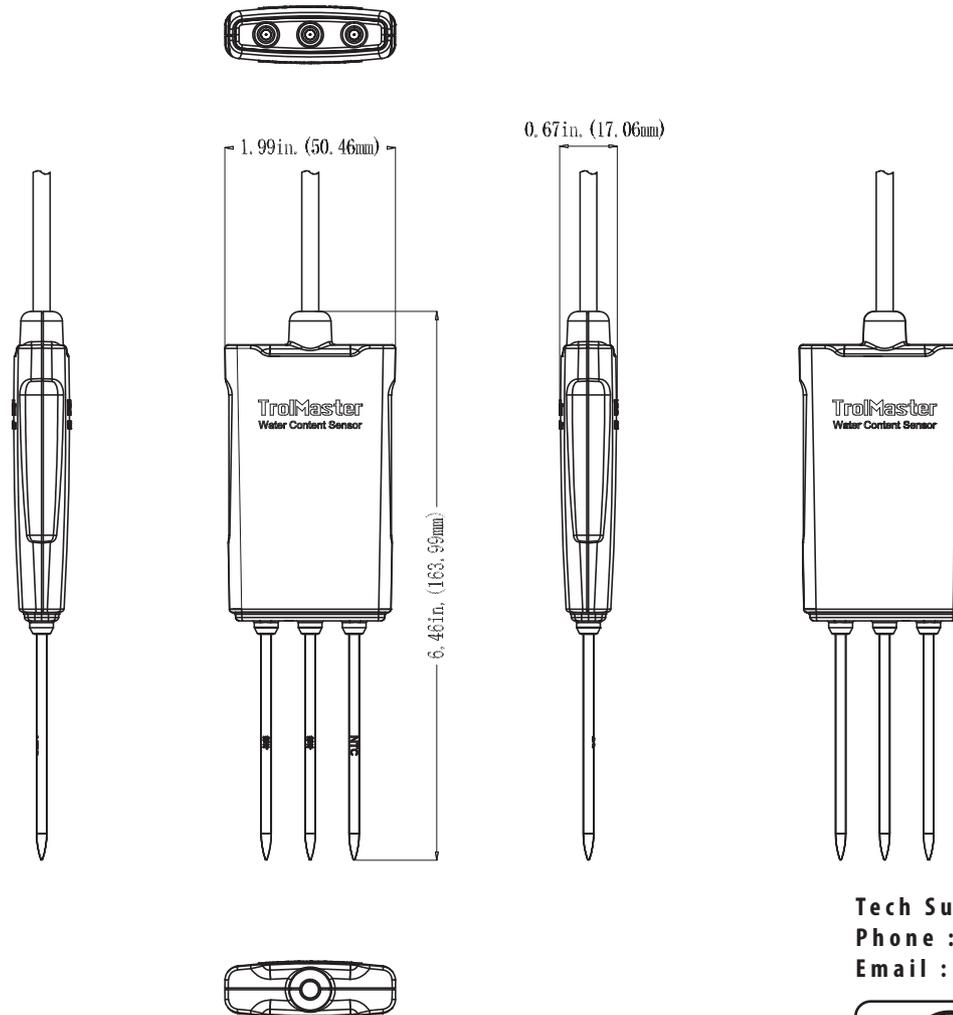

### **Tech Support**

Phone : 877-420-9876

Email : [support@trolmaster.com](mailto:support@trolmaster.com)

