

PRO-V Premium Series

by ventair™



Mixflow

INLINE EXHAUST FAN

- Commercial grade performance
- Integrated energy saving backdraft shutter
- Ideal for Hot/Cold air transfer
- Powerful long life ball bearing motor
- 2 speeds High/Low External switch
- Plug and lead included
- High static pressure makes it ideal for longer duct runs
- Rated to 80,000 hrs continuous runtime
- Rated to 30,000 start cycles

Mixflow

INLINE EXHAUST FAN

Premium series high power mixflow inline exhaust fan



Mixflow 100 150 200

MOTOR	HIGH LOW		HIGH LOW		HIGH LOW	
Air Flow (m³H):	240	190	561	438	852	753
Motor Power (watts):	30	25	50	40	130	105
Noise Level (dB(A)):	37	30	47	39	53	45
Speed (rpm):	2500	2200	2600	2100	2500	2200

INSTALLATION						
Duct Outlet:	100mm		150mm		200mm	
Ball Bearing Motor:	Yes		Yes		Yes	
Draft Stopper:	Yes		Yes		Yes	
Min. Install Depth:	250mm		280mm		300mm	
Power Input:	220-240V~50Hz		220-240V~50Hz		220-240V~50Hz	
IP Rating:	IPX4		IPX4		IPX4	
Installation:	Plug and Lead		Plug and Lead		Plug and Lead	


SHIPPING						
Packaging Size (mm):	315 x 202 x 241		323 x 239 x 260		315 x 253 x 295	
Gross Weight:	2.29kg		2.56kg		3.65kg	
Carton Size (mm):	424 x 335 x 502		498 x 343 x 535		526 x 335 x 615	
Carton Weight:	9.82kg		12.73kg		18.38kg	
Carton Qty:	4 pieces		4 pieces		4 pieces	
Pallet Qty:	224 pieces		128 pieces		112 pieces	

INCLUDES	
1 x Exhaust Unit	


Model	Size	Outer Carton	EAN13 Barcode
VMFIL100	100mm	19339310003509	9 339310 003502 >
VMFIL150	150mm	19339310003295	9 339310 003298 >
VMFIL200	200mm	19339310003523	9 339310 003526 >




DIMENSIONS

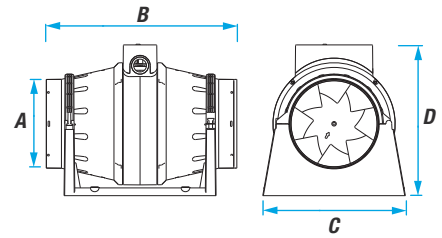

	A	B	C	D
VMFIL100	Ø97mm	297mm	197mm	229mm
VMFIL150	Ø145mm	312mm	234mm	247mm
VMFIL200	Ø196mm	296mm	247mm	282mm

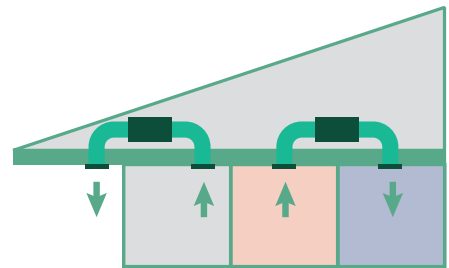

PRESSURE

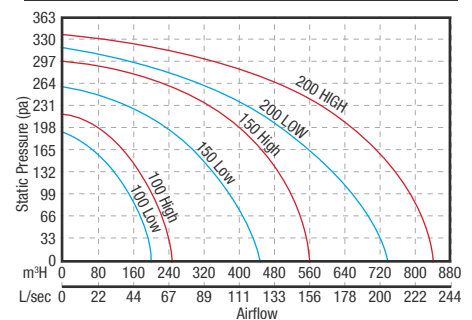

ventairtm
THE AIR MOVEMENT SPECIALISTS

+61 3 9775 0556
+61 3 9775 0775
sales@ventair.com.au

4 Capital Place, Carrum Downs Vic 3201
www.ventair.com.au