

Technical Data Sheet

CODE 16153

CA 150 MD

In-line centrifugal fans in metal



Certifications



CB TEST CERTIFICATE

Technical and performance data

Frequency (Hz)	50	Airflow at 1st speed (l/s)	138
Insulation class	II°	Airflow at 1st speed (m³/h)	497
IP	44	Max airflow at Max speed (l/s)	214
Max absorbed current at Max speed (A)	0,70	Max airflow at Max speed (m³/h)	770
Max absorbed current at Min speed (A)	0,60	Max pressure at Max speed (mmH2O)	54
Max absorbed power at Max speed (W)	155	Max pressure at Max speed (Pa)	530
Max ambient temperature for continuous operation (°C)	50	Max RPM	2080
Nominal diameter (mm)	150	Min RPM	1600
Power absorbed at 1st speed (W)	100	Pressure at 1st speed (mmH2O)	27
Voltage (V)	220-240	Pressure at 1st speed (Pa)	265
Weight (Kg)	6,1	Sound pressure at 3 m - min speed Lp [dB (A)] 3m - min speed	40,7
		Sound pressure at 3m at Max speed Lp [dB (A)]	48,0

Dimensions

Size A (mm)	347
Size B (mm)	275
Size C (mm)	424
Size D (mm)	147
Size E (mm)	17
Size F (mm)	17

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:

prevendita@vortice-italy.com

After Sales:

postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

sales@vortice.ltd.uk

Technical Dept:

technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:

export@vortice-italy.com

After Sales:

after-sales@vortice-italy.com

Technical Data Sheet

CODE 16153

CA 150 MD


In-line centrifugal fans in metal



Description

- Pickled and phosphated steel housing with polyester powder-coated finish, resistant to the aggressive action of atmospheric agents.
- Nominal diameter 150 mm.
- 2 speed AC motor with thermal overload cutout and shaft turning in ball bearings, coupled to backward curved centrifugal impeller.
- Operation controllable by remote sensors monitoring: Temperature, Relative Humidity, Smoke and Presence.
- Zinc-coated steel brackets for wall mounting.
- Speed adjustable through Vortice speed control.

Curves

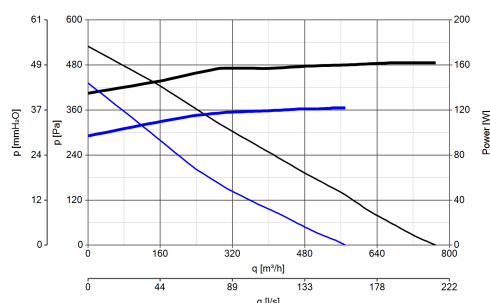

Accessories



**KIT SCB
(TRASF.E.C.)**

Code 22481



**CA-MU (STAFFE
DI SOSTEGNO)**

Code 22674



TRIO-CA

Code 12869



**C 1.5
(COMANDO EL.
1.5 A)**

Code 12966



**C 2.5
(COMANDO EL.
2.5 A)**

Code 12967

PER INFORMAZIONI / FOR INFORMATION

ITALY

UNITED KINGDOM & REP. OF
IRELAND

OTHER COUNTRIES

Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com