

Technical Data Sheet

CODE 17179

LINEO 150 ES

Energy saving mixed flow extractor fans



Certifications




CB TEST CERTIFICATE

Technical and performance data

Corrente max assorbita a 2V (A)	0,07	Max pressure at 6V (Pa)	135,3
Frequency (Hz)	50-60	Max pressure at 10V (mmH2O)	44,2
Insulation class	II°	Max pressure at 4V (mmH2O)	8,5
IP	45	Max pressure at 6V (mmH2O)	13,8
Max absorbed current at 10V (A)	0,50	Max pressure at 8V (mmH2O)	22,7
Max absorbed current at 4V (A)	0,10	Max pressure at 8V (Pa)	222,6
Max absorbed current at 6V (A)	0,16	Portata max a 2V (l/s)	40,3
Max absorbed current at 8V (A)	0,30	Portata max a 2V (m3/h)	145
Max absorbed power at 10V (W)	55	Potenza sonora Lw [dB (A)] IN	55,2
Max absorbed power at 4V (W)	11	ASPIRAZIONE - a 2V	
Max absorbed power at 6V (W)	17	Potenza sonora Lw [dB (A)] IN MANDATA	55,7
Max absorbed power at 8V (W)	34	- a 2V	
Max ambient temperature for continuous operation (°C)	60	Pressione max a 2V (mmH2O)	2,2
Nominal diameter (mm)	150	Pressione max a 2V (Pa)	21,6
Potenza max assorbita a 2V (W)	4,7	Pressione sonora Lp [dB (A)] 3m IN	37,6
Voltage (V)	220-240	ASPIRAZIONE - a 2V	
Weight (Kg)	2,6	Pressione sonora Lp [dB (A)] 3m IN	38,2
Breakout sound power at 10V Lw [dB (A)]	62,5	MANDATA - a 2V	
Breakout sound power at 2V LWA [dB (A)]	36,7	Pressione sonora Lp [dB (A)] 3m	16,1
Breakout sound power at 4V Lw [dB (A)]	41,5	IRRADIATO - a 2V	
Breakout sound power at 6V Lw [dB (A)]	47,8	RPM 2V	695
Breakout sound power at 8V Lw [dB (A)]	56,1	RPM at 10V	2480
Breakout sound pressure at 3m at 10V Lp [dB (A)]	41,9	RPM at 4V	1260
Breakout sound pressure at 3m at 4V Lp [dB (A)]	21	RPM at 6V	1595
Breakout sound pressure at 3m at 6V Lp [dB (A)]	27,2	RPM at 8V	2125
Breakout sound pressure at 3m at 8V Lp [dB (A)]	35,5	Sound power at extract side at 10V speed LWA [dB (A)]	87,9
Max airflow at 10V (l/s)	163,9	Sound power at extract side at 4V speed LWA [dB (A)]	67,9
Max airflow at 10V (m³/h)	590	Sound power at extract side at 6V speed LWA [dB (A)]	74,6
Max airflow at 4V (l/s)	80,6	Sound power at extract side at 8V speed LWA [dB (A)]	82,1
Max airflow at 4V (m³/h)	290	Sound power at supply side at 10V speed LWA [dB (A)]	86,4
Max airflow at 6V (l/s)	102,8	Sound power at supply side at 4V speed LWA [dB (A)]	69,6
Max airflow at 6V (m³/h)	370	Sound power at supply side at 6V speed LWA [dB (A)]	75,2
Max airflow at 8V (l/s)	138,9	Sound power at supply side at 8V speed LWA [dB (A)]	82,1
Max airflow at 8V (m³/h)	500	Sound pressure at extract side at 3m at 10V Lp [dB (A)]	70,3
Max pressure at 10V (Pa)	433,5	Sound pressure at extract side at 3m at 4V Lp [dB (A)]	50,4
Max pressure at 4V (Pa)	83,4	Sound pressure at extract side at 3m at 6V Lp [dB (A)]	57,1
		Sound pressure at extract side at 3m at 8V Lp [dB (A)]	64,6
		Sound pressure at supply side at 3m at 10V Lp [dB (A)]	68,9
		Sound pressure at supply side at 3m at 4V Lp [dB (A)]	52,1
		Sound pressure at supply side at 3m at 6V	57,7

Lp [dB (A)]	
Sound pressure at suply side at 3m at 8V	64,5
Lp [dB (A)]	

Dimensions

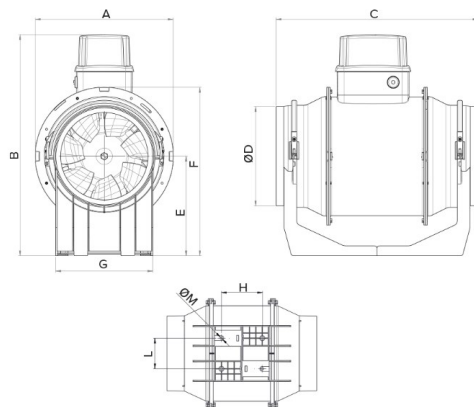

Size A (mm)	214,5
Size B (mm)	265
Size C (mm)	294
Size D (mm)	146
Size E (mm)	112,5
Size F (mm)	212
Size G (mm)	110
Size H (mm)	80
Size L (mm)	60
Size M (mm)	5,5

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:

prevendita@vortice-italy.com

After Sales:

postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

sales@vortice.ltd.uk

Technical Dept:

technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:

export@vortice-italy.com

After Sales:

after-sales@vortice-italy.com

Technical Data Sheet

CODE 17179

LINEO 150 ES


Energy saving mixed flow extractor fans



Description

- Enclosures made of fire resistant plastic resin, E2 class, according with ISO EN 11925-2: 2010, in areas close to motor and electrical components.
- Nominal diameter 150 mm.
- EC (brushless) motor, thermally protected, with shaft mounted on ball bearing supports, coupled with a centrifugal impeller.
- High water resistance: IPX5 (if installed in a duct).
- Equipped with a thermal fuse overheating safety device.
- Speed adjustable through potentiometer (0-10V signal) or two-speed switch (to be set at the installation in a preset range).

Curves

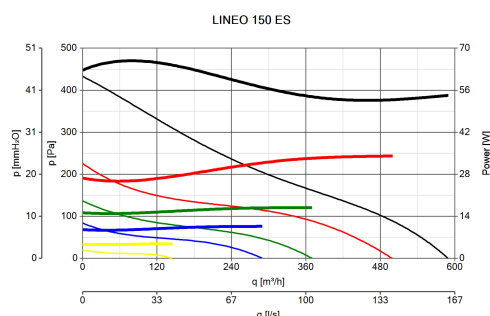

Accessories



POT-IT
Code 12826



POT
Code 12828



C TEMP
Code 12992



C SMOKE
Code 12993



C HCS
Code 12994



C PIR
Code 12998



C TIMER
Code 12999



LINEO-G 150
Code 22703

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:

prevendita@vortice-italy.com

After Sales:

postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

sales@vortice.ltd.uk

Technical Dept:

technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:

export@vortice-italy.com

After Sales:

after-sales@vortice-italy.com