

# EZIFIT THRU ROOF

## WITH ABS PLASTIC COWL

### ROOF MOUNTED FANS & RELIEF VENTS




Available in metal/deck and tile roof versions, the Ezifit Thru Roof exhaust fans are easy to install and provide powerful air flow with low noise output. Its detachable IEC power lead and ABS plastic cowl makes installation and maintenance easier. A relief vent version (ie. without the fan) is also available.

- Easy to install design.
- Suits all types of tile or metal roof profiles.
- Roof flashing included.
- Available in sizes to suit 150mm and 200mm duct.
- Comes with convenient 3-pin plug and lead.
- High-performance fan allows it to exhaust from multiple points and makes it suitable for long duct runs.
- Good installation will provide quiet operation.
- “Continuous rated” motor with safety thermal protection.
- Galvanised steel circular upstand with UV stabilised ABS plastic cowl.
- Custom colour available as an optional extra.
- Speed-controllable with electronic controller.
- Ezifit Relief Vent ideal for 150 and 200mm duct mounted fan systems.

### ACCESSORIES

- Run-on Timers and Speed Controllers.
- Flexible Duct - Fire Rated AS/NZS 4254.
- Internal Grilles.
- Backdraft Damper.
- Circular Attenuator.

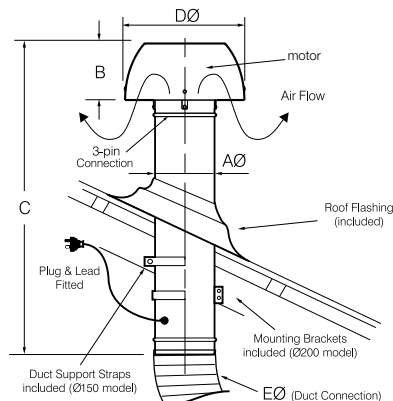

### DIMENSIONS

MODEL NO.	TYPE	AØ	B	C	DØ	EØ
ECEP152*	Exhaust Fan	139	133	745	290	150
ECEP154*	Exhaust Fan	139	133	745	290	150
ECEP156*	Exhaust Fan	139	133	745	290	150
ECEP204*	Exhaust Fan	195	194	790	443	200
ERVP150*	Relief Vent	139	133	745	290	150
ERVP200*	Relief Vent	195	194	790	443	200

All dimensions in mm

### SPECIFICATIONS

MODEL NO.	M <sup>3</sup> /HR <sup>†</sup>	L/SEC <sup>†</sup>	FAN SPEED RPM	AVG. dB(A) @ 3M	WATTS	VOLTS
ECEP152*	396	115	2510	43	59	230
ECEP154*	324	90	2000	38	50	230
ECEP156*	234	65	1150	25	45	230
ECEP204*	1008	280	1390	40	81	230

<sup>†</sup> Air flow without duct and fittings \*\* Nominate roof flashing type: M = Metal/Deck roof, T= Tile roof;

\*Conditions apply. For details visit: [fantechtrade.com.au/warranty](http://fantechtrade.com.au/warranty)