





TARANTULA TORCH 850 HPS/MH

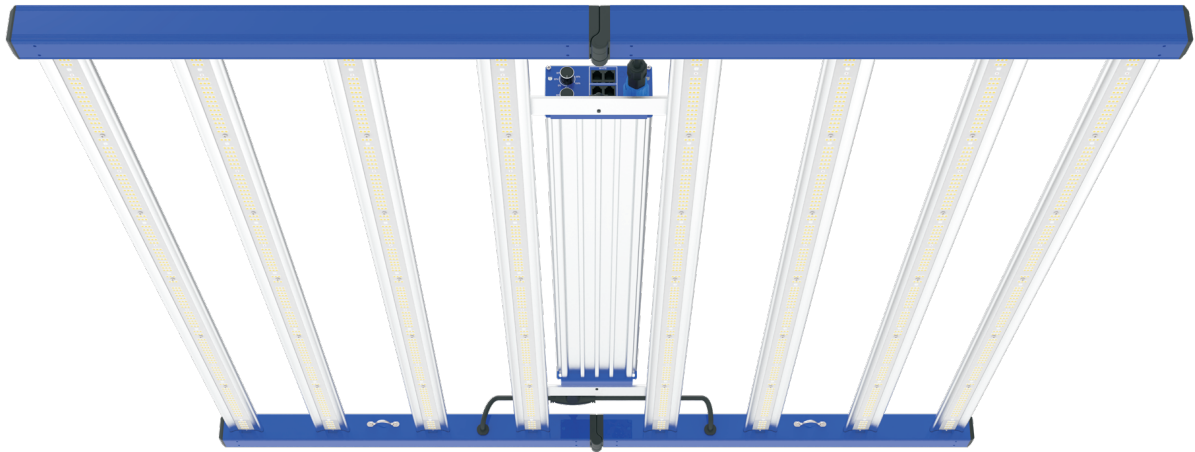

Grand Master Leds
www.grandmasterleds.com

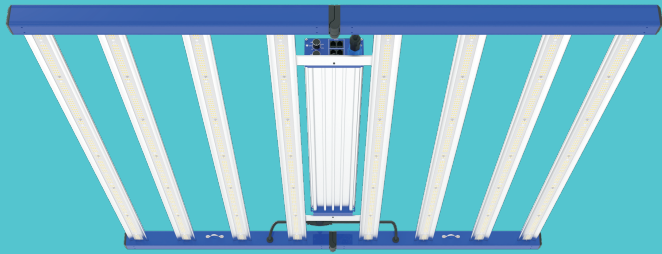

TARANTULA TORCH 850 HPS/MH

HIGH
EFFICIENCY

POWER
SAVING

ADJUSTABLE
SPECTRUM

TARANTULA TORCH 850 HPS/MH

- LEDESTAR 2835 White
- LEDESTAR 660nm + LEDESTAR 450nm
- INVENTRONICS LED driver
- Knob dimming + RJ port dimming
- Folding design for fast and easy installation
- Adjustable Spectrum
- 5 year warranty
- IP 66 Waterproof

Specifications

Model Name	Tarantula Torch 850 HPS/MH		
Input Voltage	120 Vac	240 Vac	277 Vac
Max. Input Current	7.4 Amps	3.8 Amps	3.3 Amps
Power Factor	0.99	0.95	0.95
Wattage +/- 5%	870W (745W+125W)	850W (730W+120W)	850W (730W+120W)
Qty. of Light Bars	8 Bars	8 Bars	8 Bars

LED Driver	Inventronics	Surge Protection	6KV
LED Brand	LEDESTAR	LED Configuration	2200K+660nm+450nm
Dimming	Knob + RJ port	LED life time	>100,000 hours
Dimming	10%~100% DIM-TO-OFF	Power Cord Length	10' (3.05M)
IP Rate	IP 66	Max. Ambient Temp.	104 °F (40 °C)
Warranty	5 Year	Mounting Height	≥12" (Above Canopy)

Package

Carton Size	117 x 65 x 14cm (46.1" x 25.6" x 5.5")
Weight	15.65 kg (34.50 lbs)
Qty. / Ctn.	1 Set

Details



Plug



USA 120Vac (NEMA 5-15P)
Standard




USA 240Vac (NEMA 6-15P)
Optional



USA 277Vac (NEMA 7-15P)
Optional


Dimension & Weight

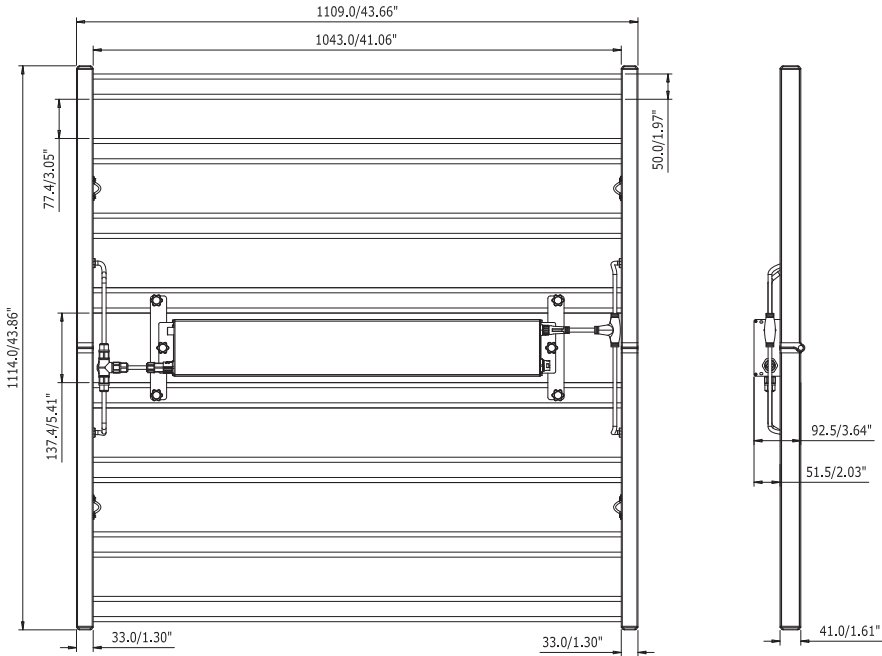

Fixture Dimension:
1114mm X 1109mm X 92.5mm
(43.86" X 43.66" X 3.64")

Fixture Net Weight:
12.35 kg (27.23 lbs) Including Driver box











Knob Dimming + RJ Port dimming 10%~100% DIM-T0-OFF


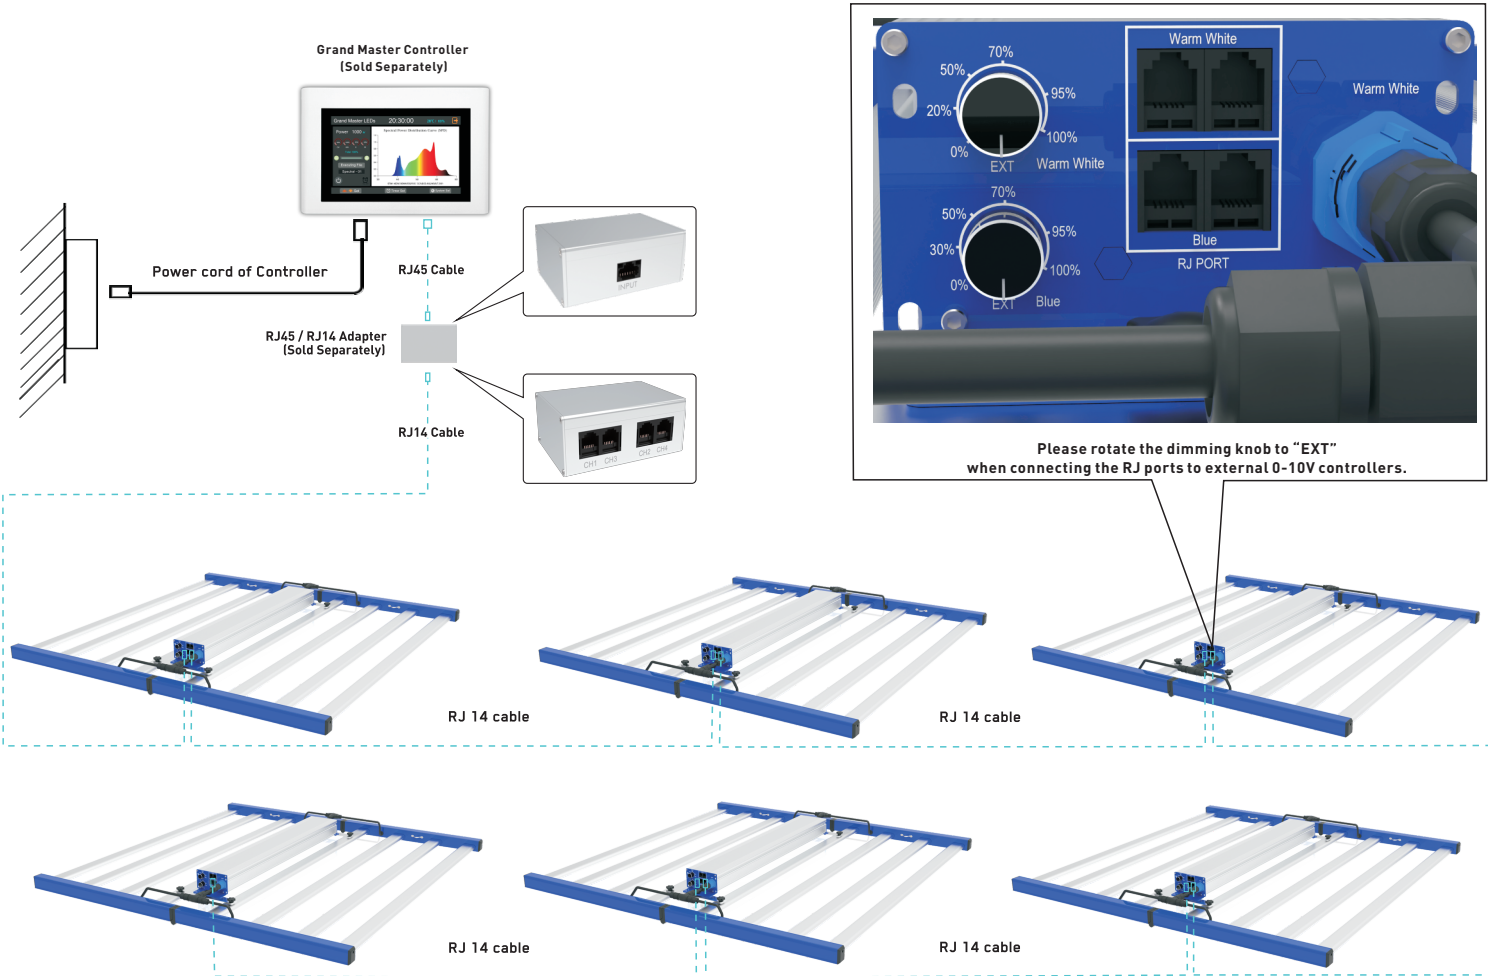


Control Signal input and output

RJ14 Cable 6P4C						
PIN 1	PIN 2	PIN 3	PIN 4	PIN 5	PIN 6	
N/A	Dim +	Dim -	Dim -	Dim +	N/A	
Fixture (INPUT) Side (RJ14 6P4C)						
PIN 1	PIN 2	PIN 3	PIN 4	PIN 5	PIN 6	
N/A	Dim +	Dim -	Dim -	Dim +	N/A	
Fixture (OUTPUT) Side (RJ14 6P4C)						
PIN 1	PIN 2	PIN 3	PIN 4	PIN 5	PIN 6	
N/A	Dim +	Dim -	Dim -	Dim +	N/A	

Spectrum Possibilities (SPD)

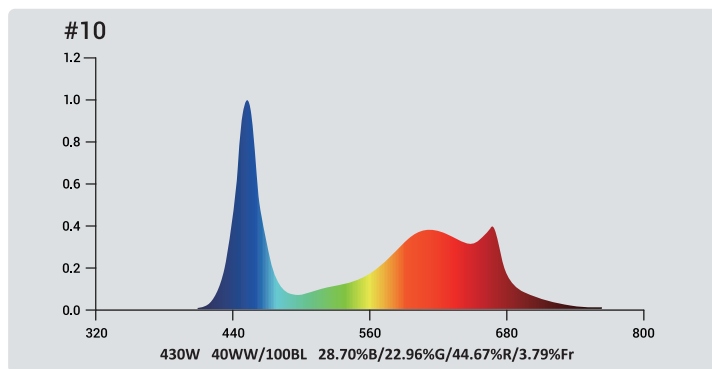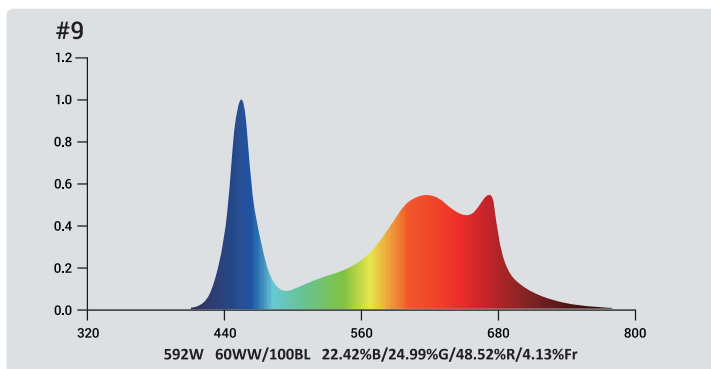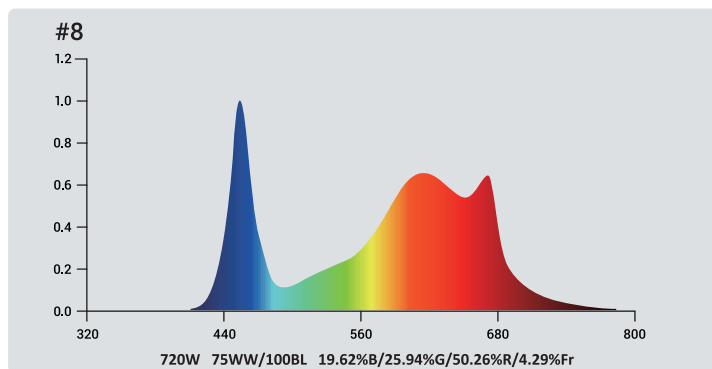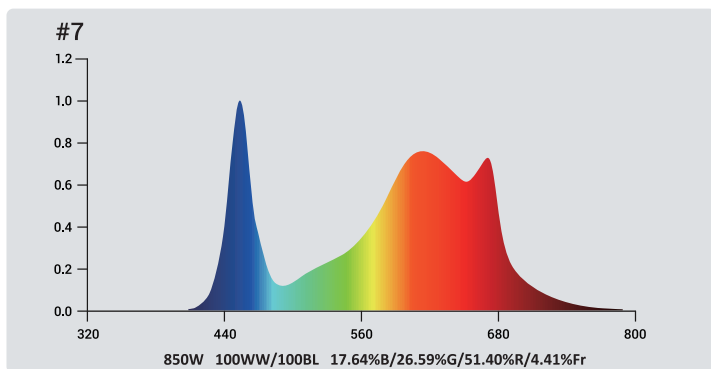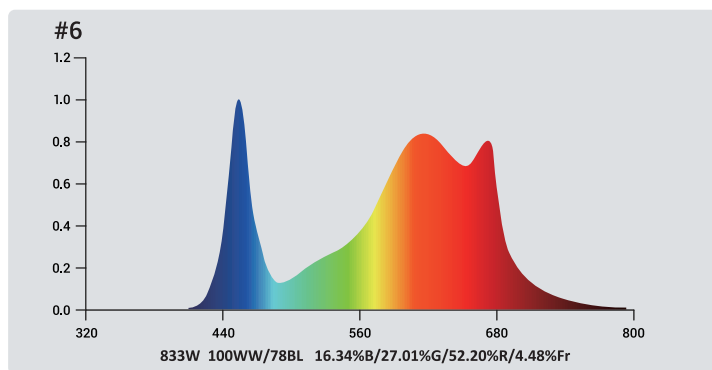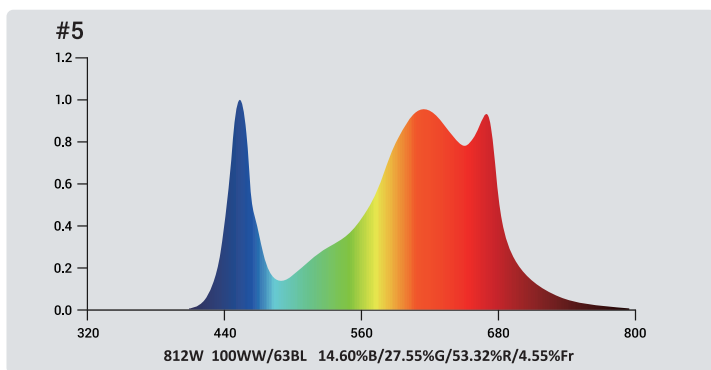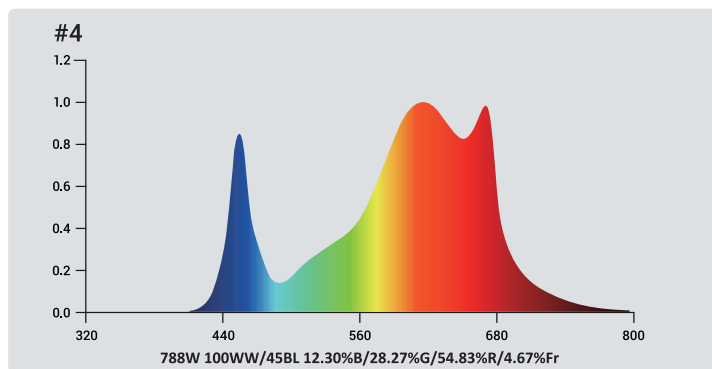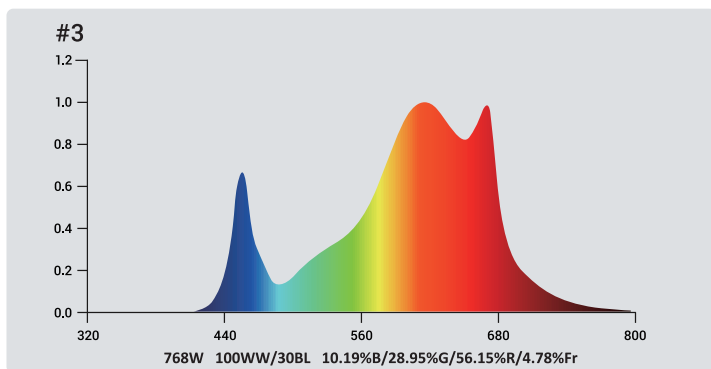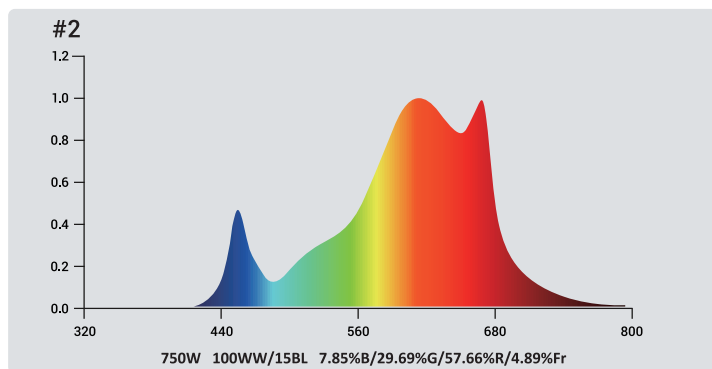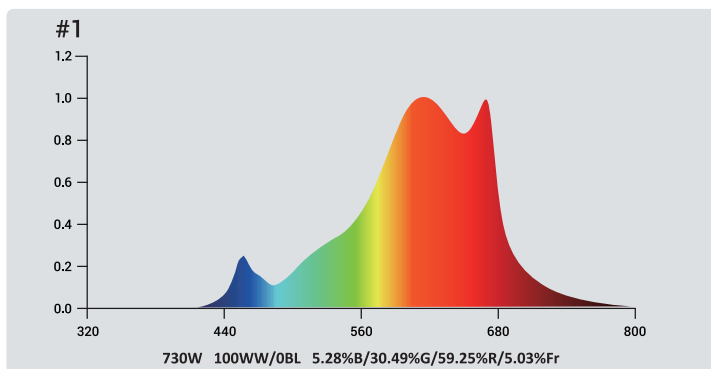

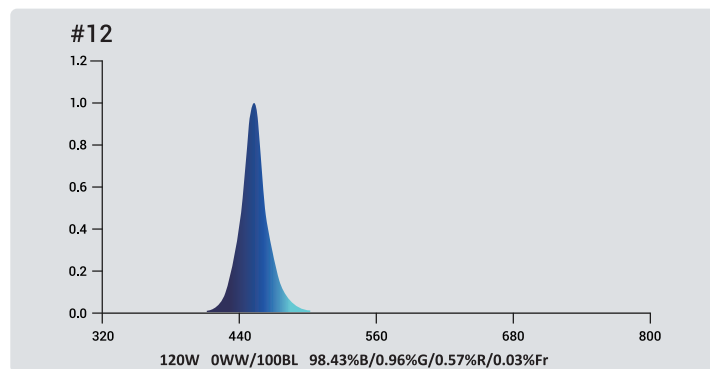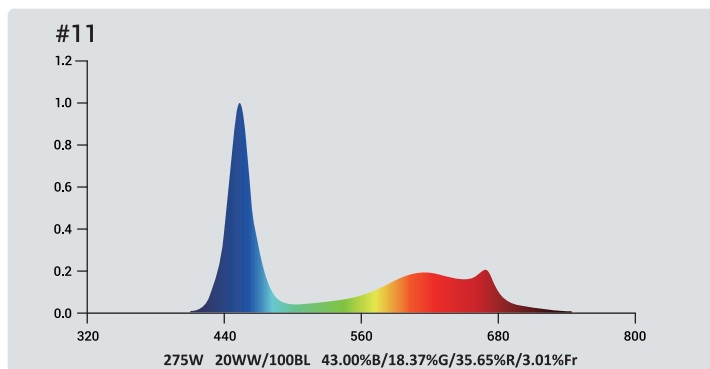

Safety Warnings and Recommendations

Warning! Carefully read the warnings below before using or working with the product!

Always adhere to the local rules and regulations when installing or using the LED fixture.

Do not open or disassemble the LED fixture, it contains no serviceable parts inside. Opening or modifying the LED fixture can be dangerous and will void the warranty.

Wearing protective gloves and glasses is recommended during installation.

Do not use the LED fixture when either the LED fixture has been dropped or is damaged or its power cord is damaged.

Replace the power cord only with original certified cords. Keep the power cord away from hot surfaces.

Modifications to the cords can lead to unwanted electromagnetic effects, which makes the product not comply with legal requirements.

Do not plug the LED fixture into a supply voltage other than what is instructed on the fixture.

Always disconnect the LED fixture from mains before performing any maintenance.

The LED lighting product is extremely bright. Do not stare directly into any of the lights.

The LED fixture will get hot during operation. Do not touch when the light is on. Keep the LED fixture away from children.

Always allow for a cool down period of at least 30 min. before touching the LED rails. Touching the LED rails when the fixture is lit or immediately afterwards can result in severe burns!

Do not expose the LED fixture to:

(ambient) temperatures outside the specified range;

dust and contamination;


direct sunlight during use or HID light that could heat up the ballast.

Do not use the LED fixture near flammable, explosive or reactive substances. Do not use sulfur vaporizers or water misters.

The installation and use of the LED fixture are the responsibility of the end user. Incorrect use or installation can lead to failure and damage to the LED fixture. Damage to the LED fixture and electronic circuitry because of incorrect installation and use will void the warranty.


Installation Instruction

1

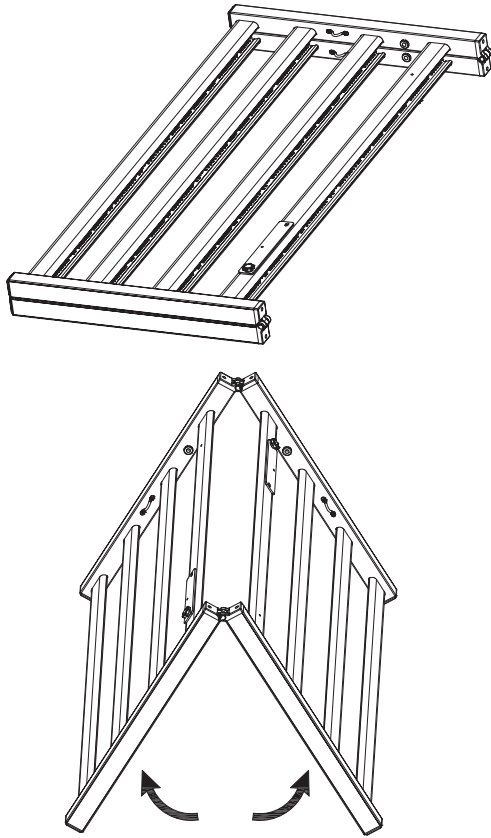


Unfold the LED fixture.

2

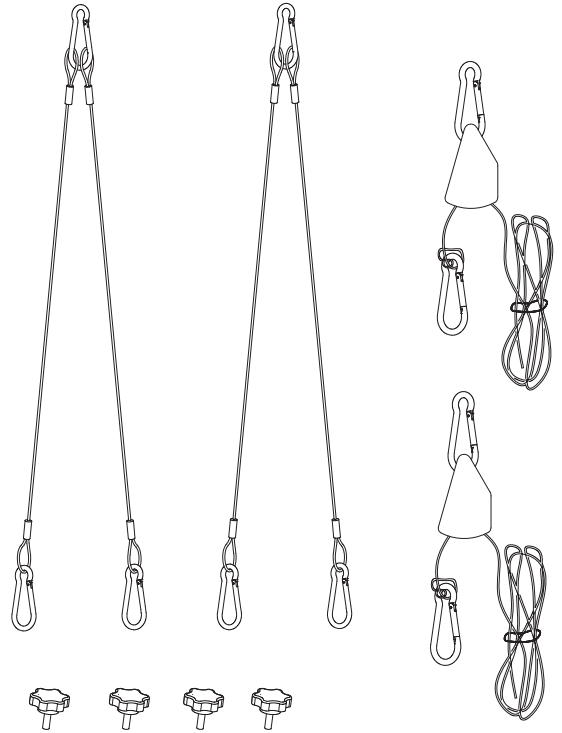


Take out the accessories from their bags.

3




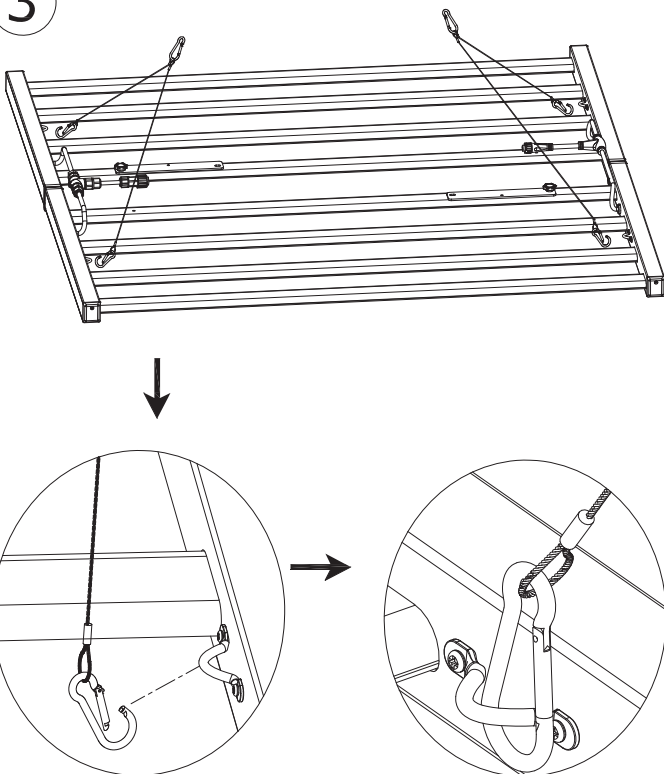


Connect carabiner hooks with mounting rings (on fixture frame).


4

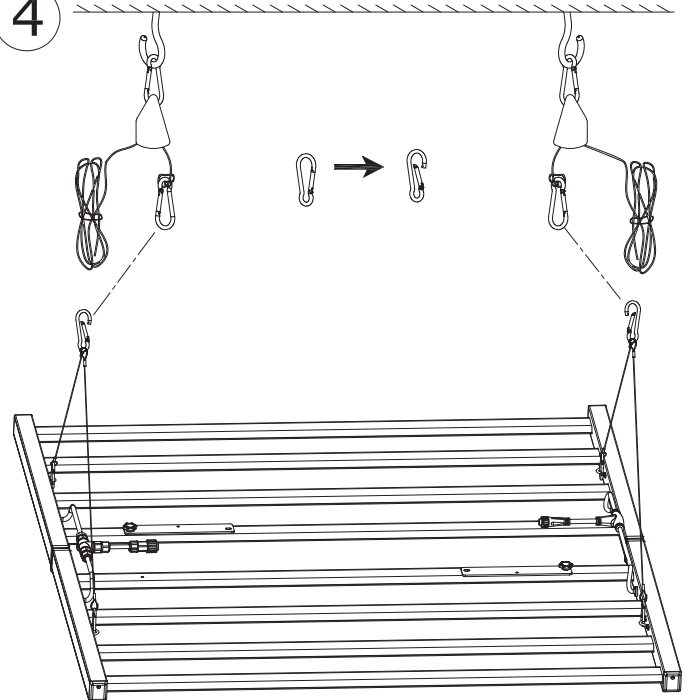

Attach steel ropes to adjustable ratchet hangers.

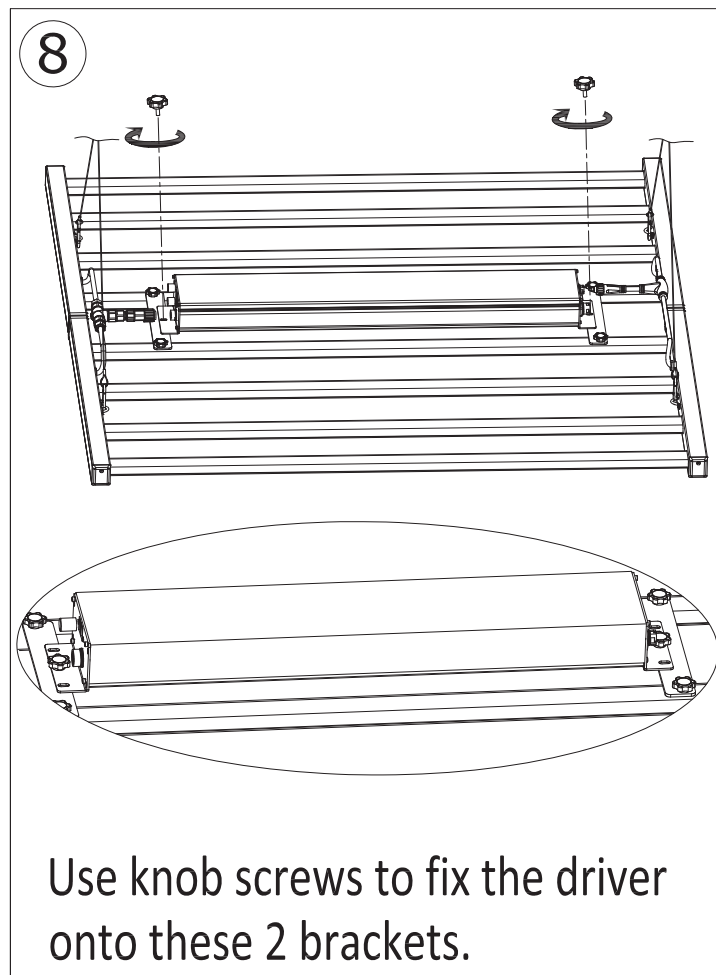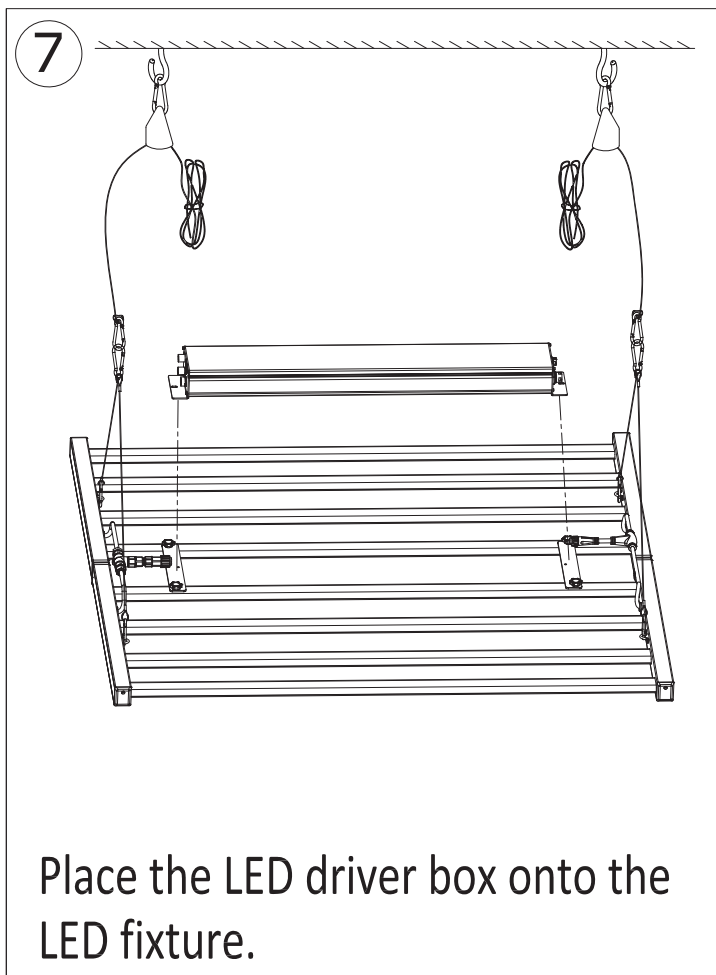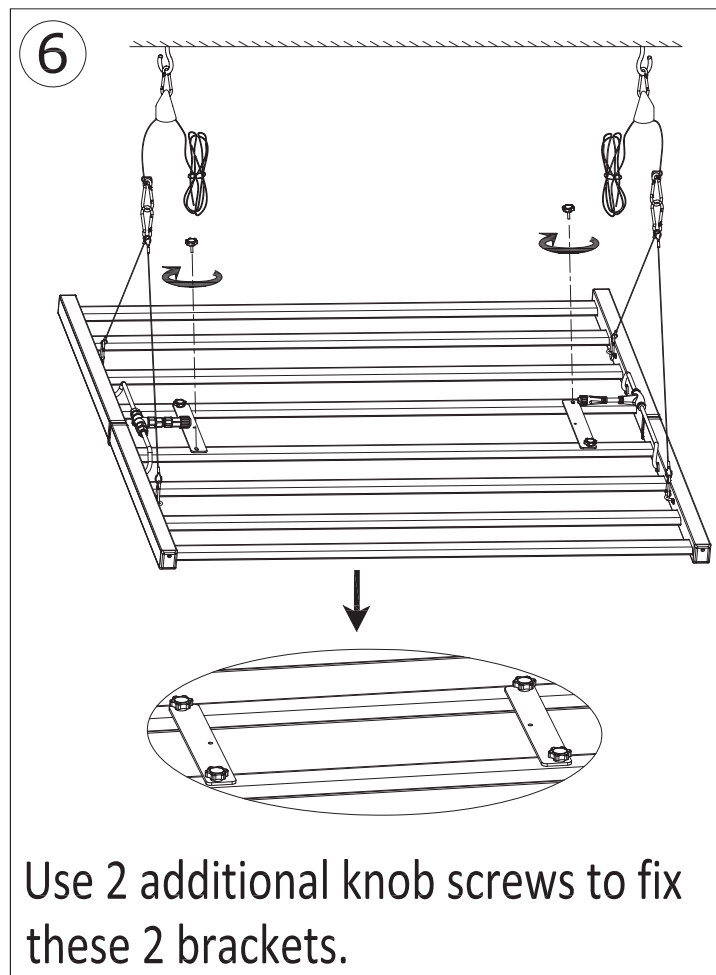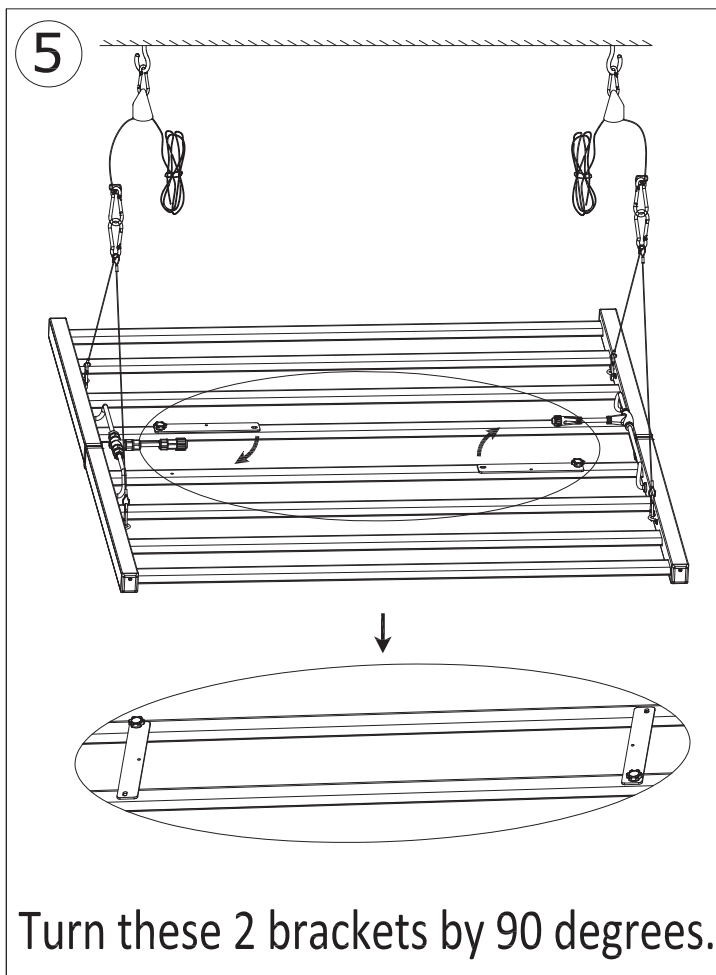


9

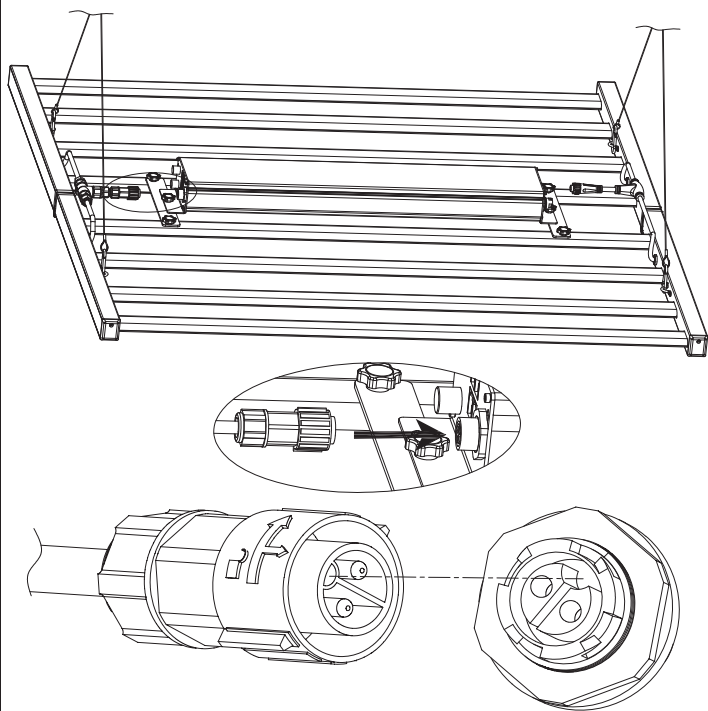


Couple the male & female connectors of DC cables at one end of the driver box.

10

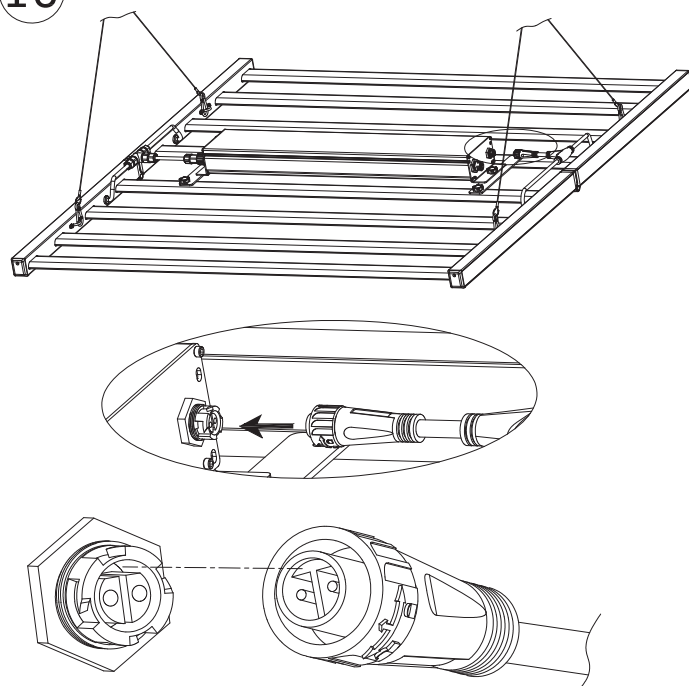


Couple the male & female connectors of DC cables at the other end of the driver box.

11

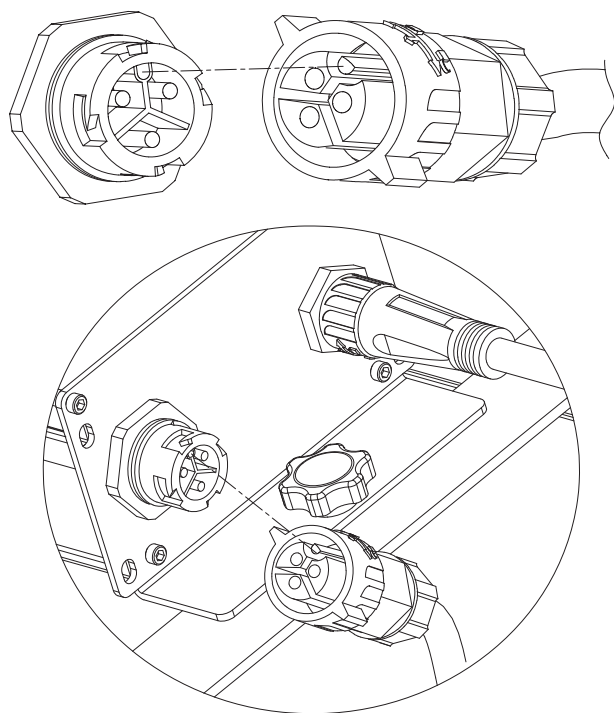


Push the connector of the AC power cord into the connector of driver AC INPUT.

12

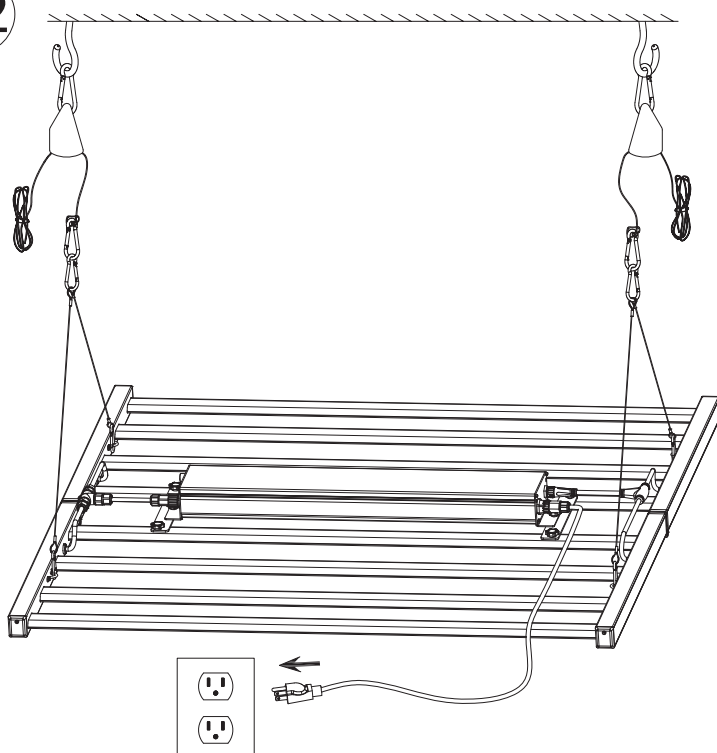

Connect the AC power plug into the mains (wall outlet).

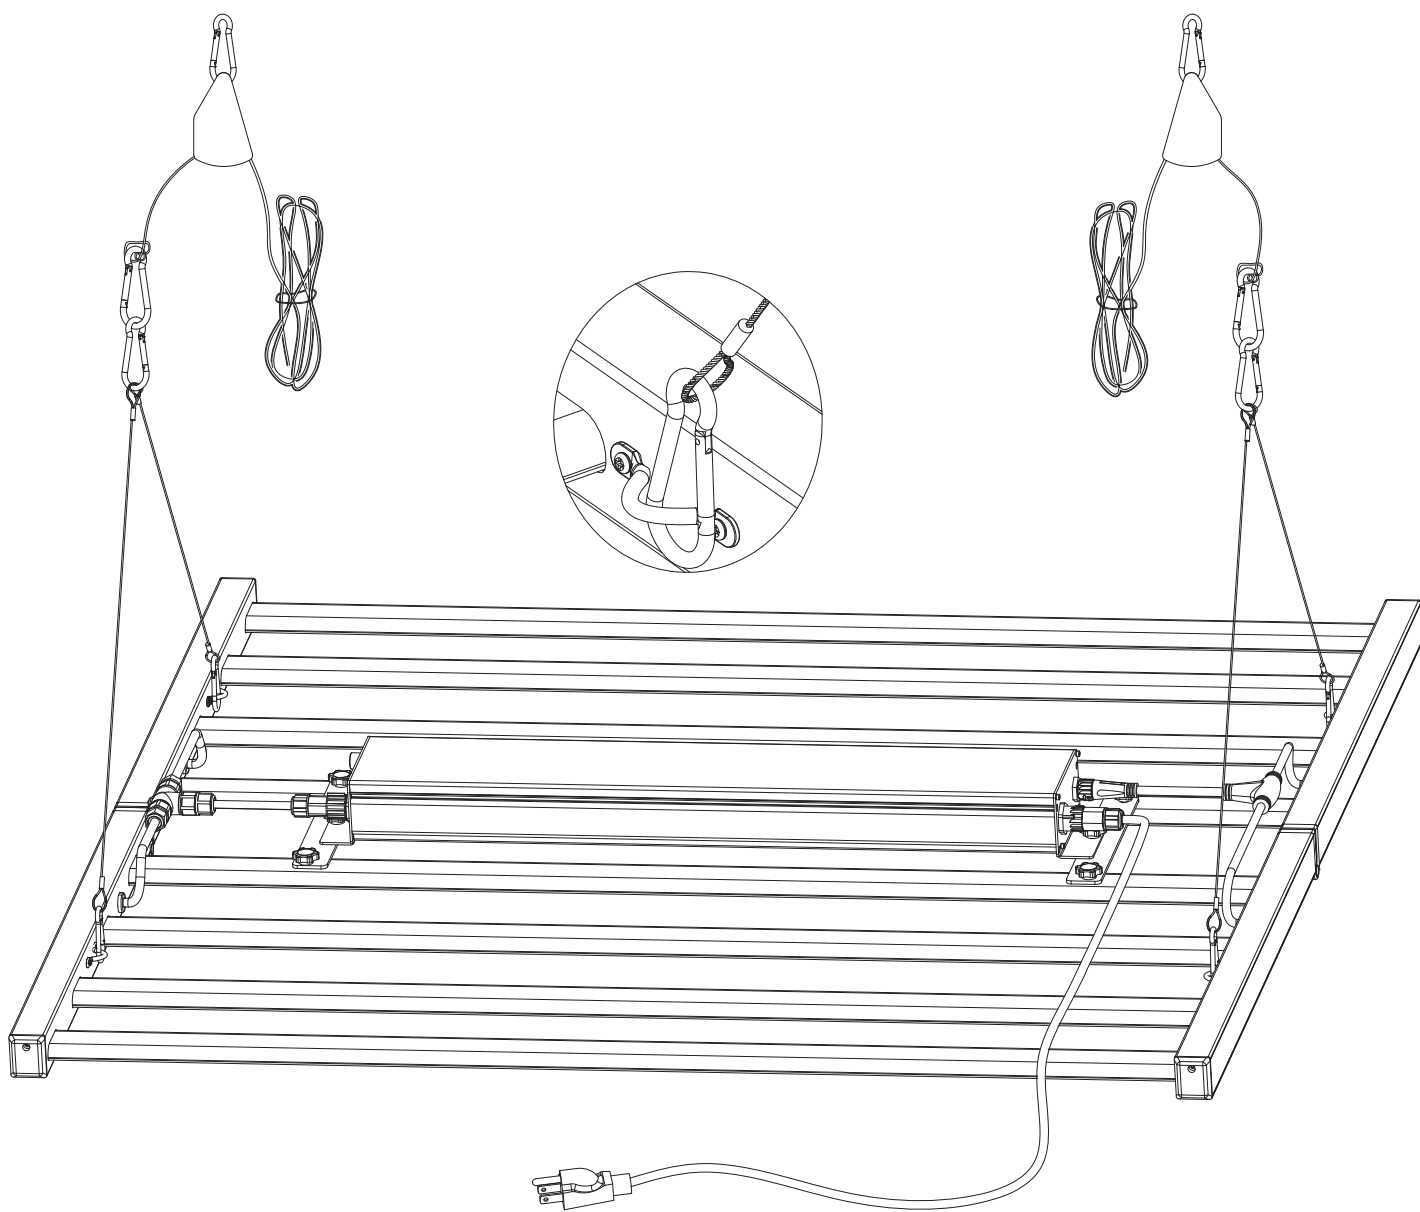

NOTES

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

