

FLEXSTAR

UV FR BAR



SPECIFICATIONS

MODEL	INPUT VOLTAGE	INPUT POWER	WAVELENGTH	DIMMING	FIXTURE DIMENSIONS	WEIGHT
FLEXSTAR FR BAR 18W	120V-277V	18W	730NM	0-10V	44.16"L X 1.18"W X 1.18"H 102 X 3 X 3CM	0.9LB / 0.41KG
FLEXSTAR UV BAR 18W	120V-277V	18W	395NM	0-10V	44.16"L X 1.18"W X 1.18"H 102 X 3 X 3CM	0.9LB / 0.41KG

Daisy-Chain (Power)

Up to 92 lights

Light Distribution

120°

Mounting Height

≥6" above Canopy

IP Rating

IP66

Cooling

Passive

Dimming

0-10V

Operation Temp.


95°F/ 35°C Max.

Certifications


ETL/TISI/CE

SPECTRAL OPTIONS



UV

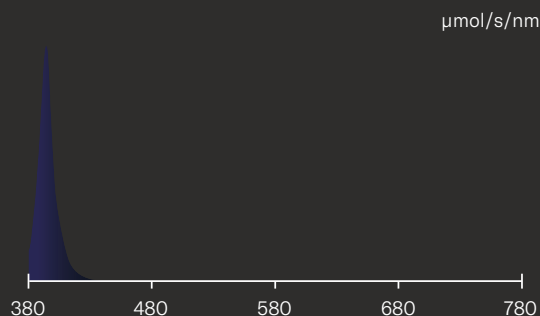

FR

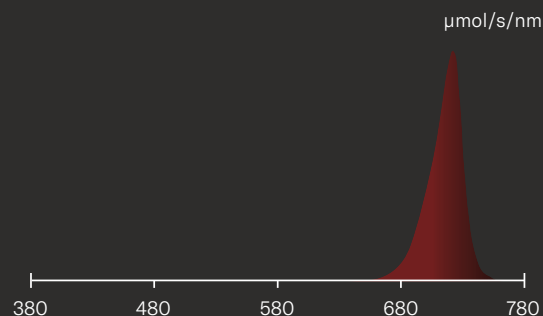

PRODUCTS

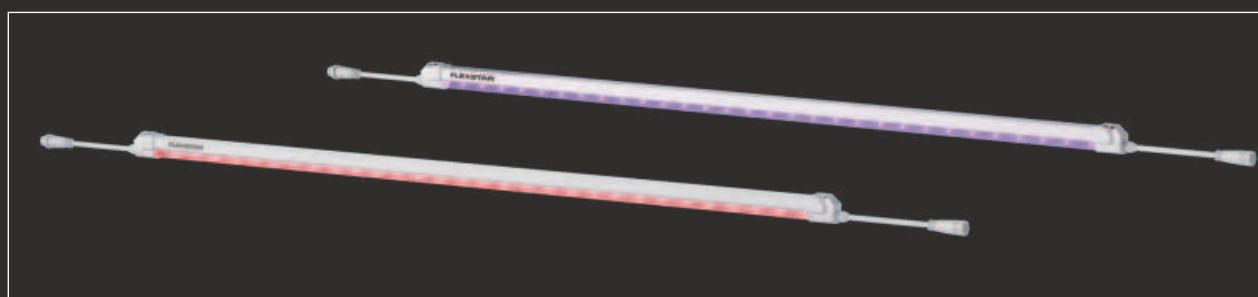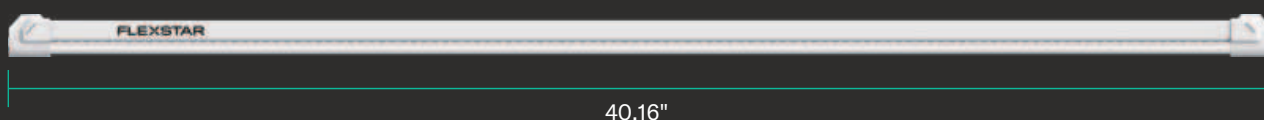

DEDICATED

Special spectrum developed specifically for the flowering period to accelerate growth and get more yield.

SCALABLE

Quick extension with simple daisy-chain wiring.

SMART CONTROL

Lights can be dimmed via a 0-10V controller.

FLEXIBLE

Slim T5 size fits different applications and cooperates with other grow lights.

sales@flex-star.com
www.flex-star.com



CONTROLLABLE
FUNCTION
AVAILABLE



3-Year
Warranty



IP66