

FLEXSTAR

UV FR BAR




SPECIFICATIONS

MODEL	INPUT VOLTAGE	INPUT POWER	WAVELENGTH	DIMMING	FIXTURE DIMENSIONS	WEIGHT
FLEXSTAR FR BAR 18W	120V-277V	18W	730NM	0-10V	44.09"L X 1.15"W X 1.46"H 112 X 2.9 X 3.7CM	0.9LB / 0.41KG
FLEXSTAR UV BAR 18W	120V-277V	18W	395NM	0-10V	44.09"L X 1.15"W X 1.46"H 112 X 2.9 X 3.7CM	0.9LB / 0.41KG


Daisy-Chain (Power)	Up to 92 lights	Light Distribution	120°
Mounting Height	≥6” above Canopy	IP Rating	IP66
Cooling	Passive	Dimming	0-10V
Operation Temp.	95°F/ 35°C Max.	Certifications	ETL/TISI/CE

SPECTRAL OPTIONS



UV

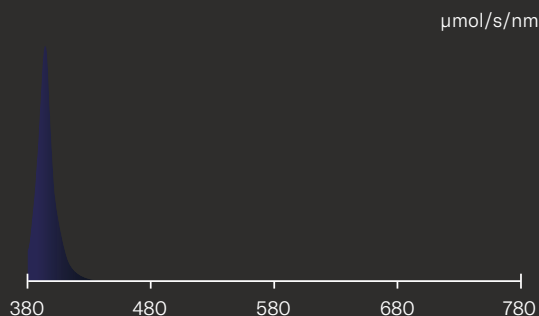

FR

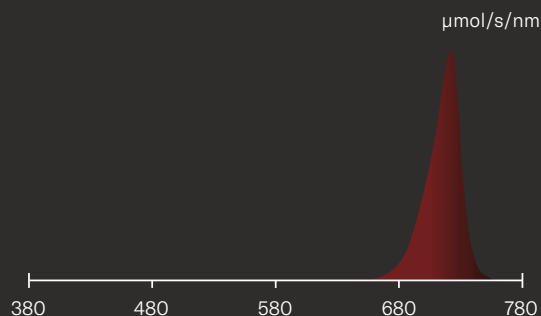

PRODUCTS

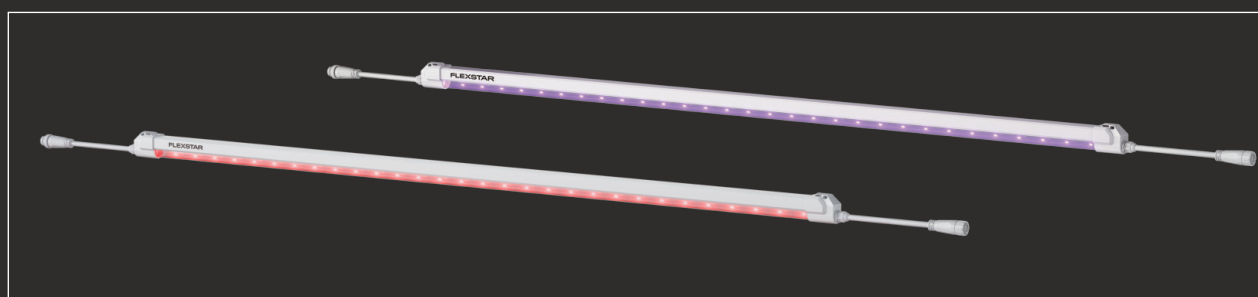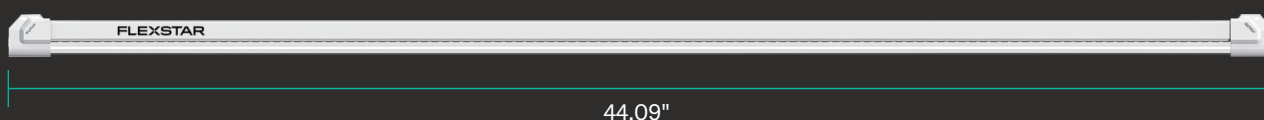

DEDICATED

Special spectrum developed specifically for the flowering period to accelerate growth and get more yield.

SCALABLE

Quick extension with simple daisy-chain wiring.

SMART CONTROL

Lights can be dimmed via a 0-10V controller.

FLEXIBLE

Slim T5 size fits different applications and cooperates with other grow lights.

sales@flex-star.com
www.flex-star.com



CONTROLLABLE
FUNCTION
AVAILABLE



3-Year
Warranty



IP66