



## 60 Series Premium Pocket Testers

pH, ORP, Conductivity/TDS/Salinity, Temp.





Durable design:  
IP67 Waterproof  
& Dustproof



Easy-to-install  
Replaceable Probes



Powered by AAA batteries, up to 2000 hours of operation time

## Display Features




Measurement Mode



Calibration Mode



Heads-Up Mode

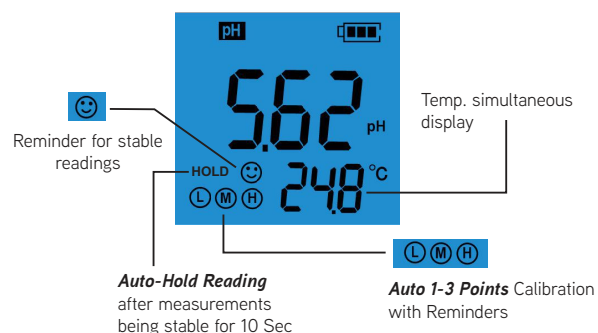

## Probe Features

6 Models for your choice



PH60  
(Glass Bulb)

General water solution  
pH Test



PH60F  
(Flat Glass)

Surface and  
micro-volume pH  
Test



PH60S  
(Spear Glass)

Solid/Semi-Solid  
pH Test



ORP60  
(Platinum)

ORP Test



EC60  
(Platinum Black)

Conductivity/TDS/  
Salinity Test



PC60  
(Glass Bulb &  
Platinum Black)

pH/Cond./TDS/  
Salinity Test

## Applications



Test anywhere



Micro-Volume  
pH Test




Skin pH Test



Food pH Test



		PH60	PH60F	PH60S
pH	Measuring Range	-2.00 to 16.00 pH		
	Resolution/Accuracy	0.01pH / ±0.01 pH		
	Calibration	1 to 3 points Auto Calibration		
ORP	Measuring Range	±1000 mV		
	Resolution/Accuracy	1 mV / ±0.2% F.S		
Temp.	Measuring Range	0 to 50.0 °C (32 to 122°F)		
	Temp. Compensation	Automatic 0 to 50.0 °C (32 to 122°F)		
Others	Heads-Up Function	Yes		
	Self-Diagnosis	Yes		
	Low-Battery Warning	Yes		
	IP Rating	IP67 Waterproof and Dustproof, Floatable		
	Power Supply	DC3V AAA batteries x4; Continuous working > 2000 hours		
	Sensor Model	PH60-E	PH60F-E	PH60S-E
	Application	General water solution's pH	Flat surface pH (fabrics, skin, paper) and micro-volume water solution's pH	Solid/Semi-Solid food samples (cheese, meat, fruit, sushi rice...) and soil's pH
	Compatible Probes	PH60-E, PH60F-E, PH60S-E, ORP60-E		

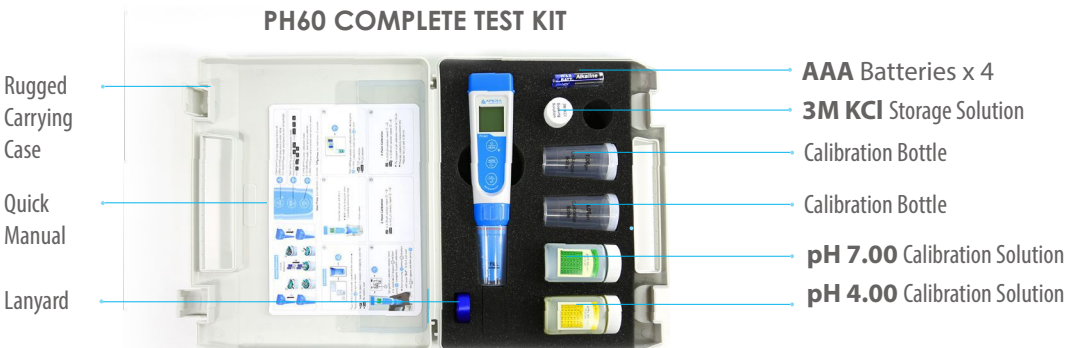



		PC60	EC60	ORP60
<b>pH</b>	Measuring Range	-2.00 to 16.00 pH	/	/
	Resolution/Accuracy	0.01 pH / ±0.01 pH	/	/
	Calibration	1 to 3 Points Auto Calibration	/	/
<b>ORP</b>	Measuring Range	/	/	±1000 mV
	Resolution/Accuracy	/	/	1 mV / ±0.2% F.S
<b>Cond.</b>	Measuring Range	0-200.0 µS/cm, 0-2000 µS/cm, 0-20.00 mS/cm	0-200.0 µS/cm, 0-2000 µS/cm, 0-20.00 mS/cm	/
	Resolution/Accuracy	0.1/1 µS, 0.01 mS / ±1% F.S	0.1/1 µS, 0.01 mS / ±1% F.S	/
	Calibration	1 to 3 Points Auto Calibration	1 to 3 Points Auto Calibration	1 Point Manual Calibration
	Temp. Coefficient Setting	0.00 to 4.00%/°C	0.00 to 4.00%/°C	/
<b>TDS.</b>	Measuring Range	0.0 ppm to 10.00 ppt	0.0 ppm to 10.00 ppt	/
	TDS. Factor Setting	0.4 to 1.0	0.4 to 1.0	/
<b>Salinity</b>	Measuring Range	0 to 10.00 ppt	0 to 10.00 ppt	/
<b>Temp.</b>	Measuring Range	0 to 50.0 °C (32 to 122°F)		
<b>Others</b>	Temp. Compensation	Yes		No
	Heads-Up Function	No	No	Yes
	Self-Diagnosis	Yes		
	Low-Battery Warning	Yes		
	IP Rating	IP67 Waterproof and Dustproof		
	Power Supply	DC3V AAA batteries x4; Continuous working > 1000 hours	DC3V AAA batteries x4; Continuous working > 1000 hours	DC3V AAA batteries x4; Continuous working > 2000 hours
	Sensor Model	PC60-E	EC60-E	ORP60-E
	Compatible Probes	PH60-E, PH60F-E, PH60S-E, PC60-E, EC60-E	EC60-E	ORP60-E