


PRO GROW LED - MODEL X

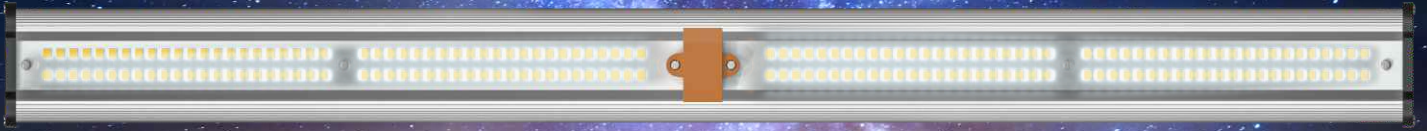


60 W 140 $\mu\text{mol/s}$

PRO GROW LED MODEL X


The PRO GROW LED 60 W Model X LED single bar emits 140 $\mu\text{mol/s}$ of 6,500 K vegetative spectrum with an industry leading CRI of 90. Coupled with ultra-reliable Optimum drivers, these lightweight bars offer cool, fanless & totally silent operation. Extended reliability is assured via IP-65 water resistant, cleanable, 100° clear lenses that protect the diodes from high moisture environments. Compatible light stands are available if required.

- 60 W MODEL X 1 BAR
- Philips 6500 K Blue Diodes
- Optimum Driver
- LED Efficacy 2.4 $\mu\text{mol/J}$
- Total PPFD 140 $\mu\text{mol/s}$

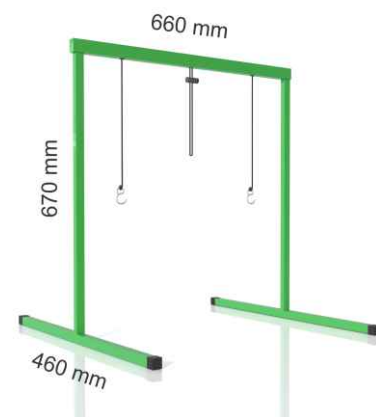

LIGHT STANDS AVAILABLE


PAR SPECTRUM GRAPH

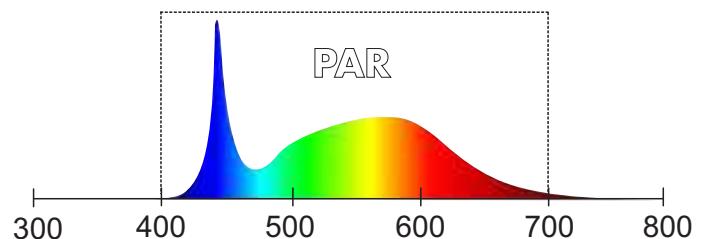

SPECIFICATIONS

Model:	60 W Model X 1 Bar
Light Source:	184 x Single Mount Diode LEDs
Input Voltage:	100 V - 240 V AC
Frequency Range:	50~60 Hz
Power/Watts:	60 W
Amps	0.25 A
Net Weight:	2.5 kg
Light Beam Angle:	100 Degree
Body Case Material:	Die Cast/Pressed Aluminum
IP Grade:	IP55 (water resistant)
Size:	L-875 mm x W-75 mm x H-58 mm
Lifespan:	>50,000 Hours
Min Operating Temp:	- 40°C
Max Operating Temp:	40°C
Warranty:	3 Year Warranty

DIMENSIONS

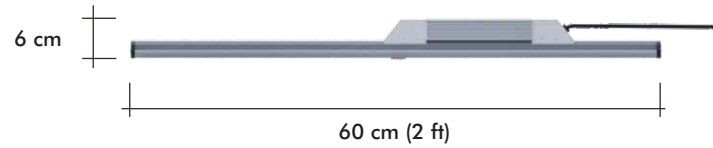


60 W - 1 BAR
140 umol/s



VOLTAGE

VOLTAGE	240 V
AMPERAGE	0.25 A

MAXIMUM RECOMMENDED LIGHT COVERAGE

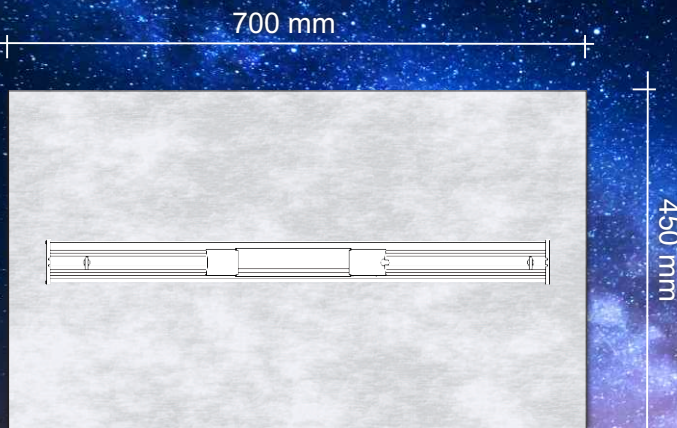

SCAN FOR MORE INFO



www.progrow.net.au

